



# Outdoor Long Range 802.11a/n 5GHz Wireless AP/CPE/Bridge (2T2R)

## Package Content

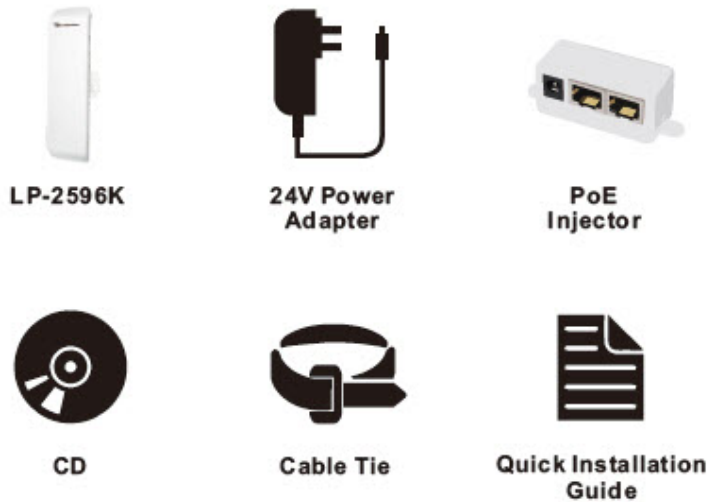

## Quick Installation Steps

1. Take off the water-proof sliding cover.
2. Connect the **Main** Ethernet port of LP-2596K with a RJ-45 8P8C cable.
3. Make the water-proof sliding cover well installed.
4. Connect PoE Injector to LP-2596K as below diagram.
  - DC: Plug in the DC jack of 24V/1A power adapter
  - PoE port: Connect to Main Ethernet port with a RJ-45 8P8C cable.
  - LAN port: Connect to your computer/laptop for Web configuration.
  - Reset button: It allows user to remotely reset the system of LP-2596K.

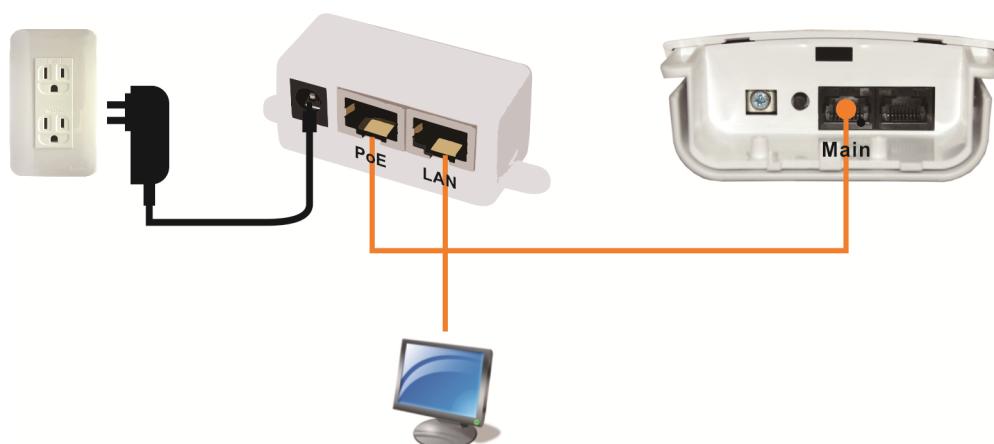

**NOTE.**

1. There is no software driver or utility installation needed.
2. RJ-45 8P8C Ethernet cable is required.
3. It takes about 60 seconds to complete the boot up sequence after LP-2596K powered up.
4. LP-2596K built in PoE pass through function on Secondary Ethernet port. It means the Secondary Ethernet port is able to provide 24V power for a secondary device and can be enabled on Web Configuration (Please refer to the statement on Advanced Setting of Radio menu).

## Software Configuration

### Network Connection Setup

The default IP of LP-2596K is **192.168.1.200**. You have to make sure your computer is on the same network segment as LP-2596K before connecting to LP-2596K.

Example: In the Windows 7 operating system

1. Press Start and enter **ncpa.cpl** in search bar. You will see network connection page.
2. Select your network interface card and Right click to set Properties.
3. Double click *Internet Protocol Version 4 (TCP/IPv4)*.
4. Select *Specify an IP address* and enter the IP address.  
IP Address: **192.168.1.x** (*x can be any number between 1 to 254 except for 200*)  
Subnet Mask: **255.255.255.0**  
Default Gateway: **192.168.1.200**
5. Click OK to complete the IP setting.

### Get started with LP-2596K

1. Open Web browser and enter **192.168.1.200** in the URL field of Web browser.



2. Enter “**admin**” as default user name, and “**admin**” as default password.



3. After successful login , you'll see the system status on the screen. Regarding to detailed Web configurations, please refer to user manual placed in product CD.